



# AXIAL FAN


4E630, 4D630, 6E630, 6D630

Available in Forced (B) and Induced (S) Draft


## Code Description

| Code. | Description |       |          |
|-------|-------------|-------|----------|
|       | Pole        | Phase | Diameter |
| 4E630 | 4           | 1     | 630      |
| 4D630 | 4           | 3     | 630      |
| 6E630 | 6           | 1     | 630      |
| 6D630 | 6           | 3     | 630      |

Flow Rate Curve-4E/4D/6E/6D/630

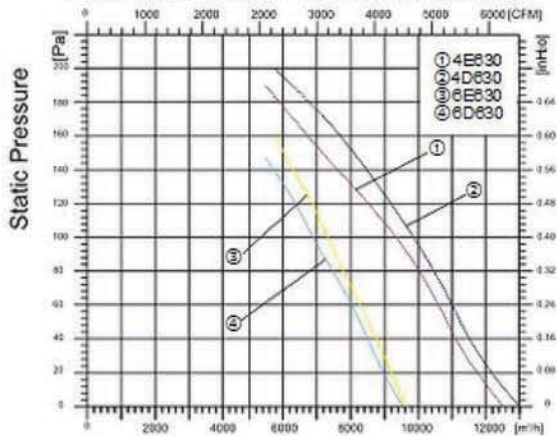

| No. | Pst | Frequency | P1  | I    |
|-----|-----|-----------|-----|------|
|     | Pa  | Hz        | W   | A    |
| ①   | 30  | 50        | 810 | 3.45 |
|     | 60  | 50        | 845 | 3.69 |
| ②   | 30  | 50        | 730 | 1.86 |
|     | 90  | 50        | 868 | 1.96 |
| ③   | 15  | 50        | 362 | 1.75 |
|     | 110 | 50        | 455 | 2.09 |
| ④   | 15  | 50        | 369 | 1.1  |
|     | 1.1 | 50        | 485 | 1.41 |

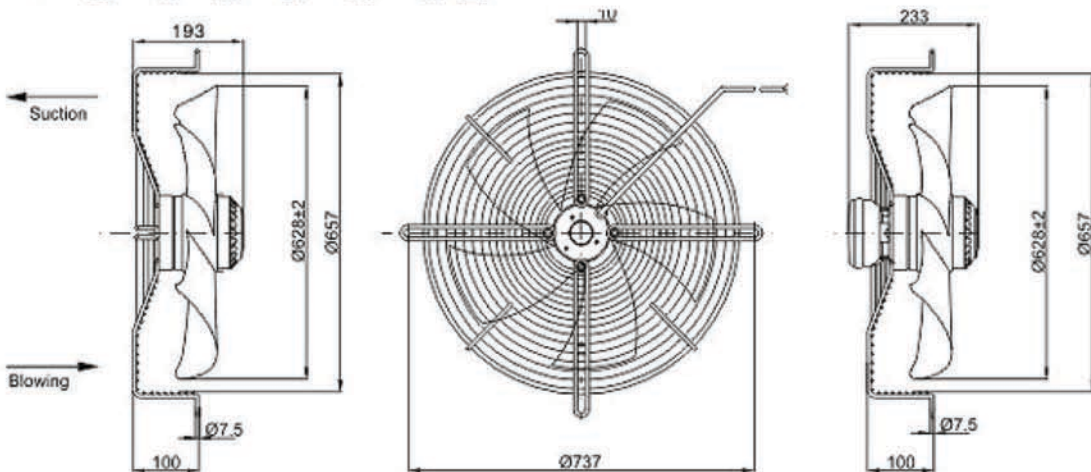

## Technical Parameter

| Model | Voltage | Frequency | Input power | Current | Air Volume        | Speed | Capacitor | Noise | Max Environmental Temperature | Weight |
|-------|---------|-----------|-------------|---------|-------------------|-------|-----------|-------|-------------------------------|--------|
|       | V       | Hz        | W           | A       | m <sup>3</sup> /h | min   | uF        | dBA   | °C                            | Kg     |
| 4E630 | 230     | 50        | 810         | 3.5     | 12500             | 1315  | 16        | 78    | 50                            | 15     |
| 4D630 | 380     | 50        | 860         | 1.95    | 13000             | 1365  | -         | 81    | 50                            | 15     |
| 6E630 | 230     | 50        | 500         | 2.2     | 9600              | 930   | 14        | 75    | 50                            | 15     |
| 6D630 | 380     | 50        | 550         | 1.57    | 9580              | 920   | -         | 75    | 50                            | 14     |