


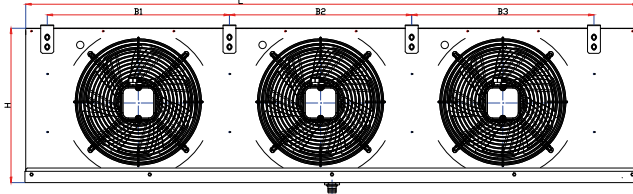


## GNA SERİSİ TİCARİ TİP STANDART ODA SOĞUTUCULARI GNA SERIES COMMERCIAL TYPE STANDARD AIR COOLERS



Hatve / Fin Spacing Fan / Fans	Model Models	Yüzey / Surface m2	Kapasite / Capacity				Fan Bilgileri / Fan Data			Boyutlar Dimensions			Giriş Input mm	Çıkış Output mm
			SC1		SC2		Fan Adet Fan Piece Adet	Fan Çapı Fan Diameter mm	Hava Debisi Air Flow 1400 rpm m3/h	L mm	A mm	H1 m		
			- 0 / + 45	- 0 / + 45	- 10 / + 45	- 10 / + 45								
			Watt	Kcal	Watt	Kcal								
TEK FANLI	GNA 1.500-1	6,8	2020	1740	1760	1510	1	300	1476	680	280	484	12	12
	GNA 2.000-1	9,0	2540	2190	2240	1930	1	300	1402	680	280	484	12	16
	GNA 2.500-1	10,9	3310	2850	2920	2510	1	350	2375	770	280	484	12	16
	GNA 3.000-1	10,4	4040	3480	3560	3060	1	400	3463	770	300	604	12	16
	GNA 3.500-1	13,8	4820	4150	4190	3610	1	400	3250	770	300	604	12	19
GNA 4.000-1	15,4	5400	4640	4770	4110	1	450	4209	830	380	604	12	19	
ÇİFT FANLI	GNA 2.000-2	8,8	2550	2190	2260	1950	2	250	1377	830	260	364	12	16
	GNA 2.500-2	9,6	3190	2750	2830	2430	2	300	2639	930	280	444	12	16
	GNA 3.000-2	12,8	4110	3530	3600	3100	2	300	2435	930	280	444	12	16
	GNA 3.500-2	16,1	4810	4140	4170	3580	2	300	2686	1030	280	484	12	19
	GNA 4.000-2	16,1	5350	4610	4740	4080	2	350	4130	1030	280	484	12	19
	GNA 4.500-2	16,1	6110	5250	5410	4660	2	350	4116	1030	280	484	12	19
	GNA 5.000-2	16,5	6510	5600	5750	4940	2	400	6373	1230	300	524	12	19
	GNA 6.000-2	21,9	8060	6930	7130	6130	2	400	6752	1230	300	524	12	22
	GNA 7.000-2	25,6	9400	8090	8250	7100	2	400	6286	1230	300	604	12	22
	GNA 8.000-2	30,7	10970	9440	9650	8300	2	450	8405	1430	380	604	12	28
	GNA 10.000-2	37,0	14720	12660	12940	11130	2	500	9574	1580	400	644	16	35
GNA 12.500-2	37,0	16250	13980	14290	12290	2	500	12432	1580	400	644	16	35	
GNA 15.000-2	55,5	20680	17780	18170	15630	2	500	10795	1580	400	644	16	35	
ÜÇ FANLI	GNA 8.000-3	25,5	10505	9035	9215	8000	3	400	9680	1780	300	524	12	28
	GNA 9.000-3	34,0	12820	11030	11270	9690	3	400	10244	1780	300	524	12	28
	GNA 10.000-3	39,7	14590	12550	12810	11020	3	400	9574	1780	300	604	12	28
	GNA 12.500-3	39,7	16420	14120	14530	12500	3	450	11707	1780	380	604	16	35
	GNA 15.000-3	49,6	19300	16600	16940	14560	3	450	10786	1780	380	604	16	35
	GNA 17.500-3	54,8	23920	20580	21190	18220	3	500	18553	2230	400	644	16	42
	GNA 20.000-3	68,5	27710	23830	24570	21130	3	500	17207	2230	400	644	19	42
GNA 22.500-3	82,3	29730	25570	27090	23300	3	500	16074	2230	400	644	19	42	
DÖRT FANLI	GNA 17.500-4	64,0	23720	20400	20970	18030	4	450	14106	2230	380	604	16	42
	GNA 20.000-4	76,8	26360	22670	23390	20120	4	450	13017	2230	380	604	19	42
	GNA 25.000-4	78,8	32700	28120	30350	26100	4	500	20960	2530	400	644	22	54
	GNA 30.000-4	94,2	38650	33230	33600	28900	4	500	20560	2530	400	644	22	54
	GNA 35.000-4	126,1	46680	40150	40620	34930	4	500	18900	2530	460	644	22	54

## GND SERİSİ TİCARİ TİP STANDART ODA SOĞUTUCULARI GND SERIES COMMERCIAL TYPE STANDARD AIR COOLERS

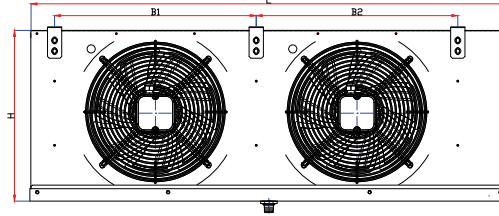

Hatve / Fin Spacing Fan / Fans	Model Models	Yüzey / Surface m2	Kapasite / Capacity				Fan Bilgileri / Fan Data			Boyutlar Dimensions			Giriş Input mm	Çıkış Output mm
			SC2		SC3		Fan Adet Fan Piece Adet	Fan Çapı Fan Diameter mm	Hava Debisi Air Flow 1400 rpm m3/h	L mm	A mm	H1 mm		
			-10 / +45 Watt	-10 / +45 Kcal	-25 / +45 Watt	-25 / +45 Kcal								
TEK FANLI	GND 1.000-1	6,9	1960	1690	1120	970	1	300	1472	680	260	484	12	16
	<b>GND 1.250-1</b>	<b>8,0</b>	<b>2550</b>	<b>2200</b>	<b>1540</b>	<b>1330</b>	<b>1</b>	<b>350</b>	<b>2515</b>	<b>770</b>	<b>280</b>	<b>484</b>	<b>12</b>	<b>16</b>
	GND 1.750-1	8,0	3140	2700	1980	1700	1	400	3614	770	300	604	12	16
	<b>GND 2.000-1</b>	<b>10,6</b>	<b>3890</b>	<b>3340</b>	<b>2390</b>	<b>2060</b>	<b>1</b>	<b>400</b>	<b>3443</b>	<b>770</b>	<b>300</b>	<b>604</b>	<b>12</b>	<b>19</b>
	GND 2.500-1	11,8	4700	4040	2970	2550	1	450	4478	830	380	604	12	19
ÇİFT FANLI	GND 1.000-2	6,7	2000	1720	1170	1000	2	250	1540	830	240	364	12	16
	<b>GND 1.250-2</b>	<b>7,3</b>	<b>2470</b>	<b>2120</b>	<b>1490</b>	<b>1290</b>	<b>2</b>	<b>300</b>	<b>2787</b>	<b>930</b>	<b>260</b>	<b>444</b>	<b>12</b>	<b>16</b>
	GND 1.750-2	9,7	3210	2760	1980	1700	2	300	2616	930	260	444	12	16
	<b>GND 2.000-2</b>	<b>12,4</b>	<b>3970</b>	<b>3410</b>	<b>2390</b>	<b>2060</b>	<b>2</b>	<b>300</b>	<b>2842</b>	<b>1030</b>	<b>260</b>	<b>484</b>	<b>12</b>	<b>19</b>
	GND 2.500-2	12,4	4840	4160	3040	2620	2	350	4459	1030	260	444	12	19
	<b>GND 3.000-2</b>	<b>14,3</b>	<b>5440</b>	<b>4680</b>	<b>3390</b>	<b>2920</b>	<b>2</b>	<b>400</b>	<b>7082</b>	<b>1230</b>	<b>300</b>	<b>604</b>	<b>12</b>	<b>22</b>
	GND 3.500-2	19,1	6860	5900	4270	3670	2	400	6709	1230	300	604	12	22
	<b>GND 4.000-2</b>	<b>19,6</b>	<b>7280</b>	<b>6260</b>	<b>4580</b>	<b>3940</b>	<b>2</b>	<b>400</b>	<b>6708</b>	<b>1230</b>	<b>300</b>	<b>604</b>	<b>12</b>	<b>28</b>
	GND 4.500-2	23,0	8560	7370	5380	4630	2	450	8956	1430	380	604	12	28
	<b>GND 7.000-2</b>	<b>28,4</b>	<b>12350</b>	<b>10620</b>	<b>7830</b>	<b>6730</b>	<b>2</b>	<b>500</b>	<b>13352</b>	<b>1580</b>	<b>400</b>	<b>644</b>	<b>16</b>	<b>35</b>
GND 9.000-2	42,4	16260	13980	10270	8840	2	500	11880	1580	400	644	16	35	
ÜÇ FANLI	<b>GND 5.000-3</b>	<b>22,9</b>	<b>9400</b>	<b>8080</b>	<b>5810</b>	<b>4990</b>	<b>3</b>	<b>400</b>	<b>10725</b>	<b>1780</b>	<b>300</b>	<b>604</b>	<b>16</b>	<b>28</b>
	GND 6.000-3	30,3	11090	9530	7010	6030	3	400	10179	1780	300	604	16	28
	<b>GND 7.000-3</b>	<b>39,7</b>	<b>13040</b>	<b>11210</b>	<b>8120</b>	<b>6980</b>	<b>3</b>	<b>450</b>	<b>12626</b>	<b>1780</b>	<b>380</b>	<b>604</b>	<b>16</b>	<b>35</b>
	GND 8.000-3	38,0	14980	12880	9290	7990	3	450	11838	1780	380	604	16	35
	<b>GND 9.000-3</b>	<b>45,8</b>	<b>17000</b>	<b>14620</b>	<b>10570</b>	<b>9090</b>	<b>3</b>	<b>450</b>	<b>11152</b>	<b>1780</b>	<b>380</b>	<b>604</b>	<b>16</b>	<b>35</b>
	GND 10.000-3	42,4	18990	16330	11920	10250	3	500	19923	2230	400	644	16	42
<b>GND 12.500-3</b>	<b>52,8</b>	<b>22170</b>	<b>19070</b>	<b>13960</b>	<b>12000</b>	<b>3</b>	<b>500</b>	<b>18730</b>	<b>2230</b>	<b>400</b>	<b>644</b>	<b>19</b>	<b>42</b>	
DÖRT FANLI	<b>GND 10.000-4</b>	<b>48,6</b>	<b>18970</b>	<b>16310</b>	<b>11780</b>	<b>10130</b>	<b>4</b>	<b>450</b>	<b>15521</b>	<b>2230</b>	<b>380</b>	<b>604</b>	<b>16</b>	<b>42</b>
	GND 12.500-4	59,4	22220	19110	13960	12000	4	450	14569	2230	380	604	19	42
	<b>GND 15.000-4</b>	<b>73,2</b>	<b>29130</b>	<b>25050</b>	<b>17550</b>	<b>15090</b>	<b>4</b>	<b>500</b>	<b>18900</b>	<b>2530</b>	<b>400</b>	<b>644</b>	<b>22</b>	<b>54</b>
	GND 17.500-4	90,5	34680	29820	20810	17890	4	500	16959	2530	460	644	22	54

## GYE SERİSİ YATIK ODA SOĞUTUCULARI GYE SERIES ANGLED CEILING TYPE UNIT COOLERS



Hatve / Fin Spacing	Model Model	Yüzey / Surface	Kapasite / Capacity				Fan Bilgileri / Fan Data			Boyutlar Dimensions			Giriş Input	Çıkış Output	
			SC1		SC2		Fan Adet Fan Piece	Fan Çapı Fan Diameter	Hava Debisi Air Flow 1400 rpm	L	W	H			
			- 0 / + 45	- 0 / + 45	- 10 / + 45	- 10 / + 45									
			m2	Watt	Kcal	Watt	Kcal	Adet	mm	m3/h	mm	mm			mm
6 mm	TEK FANLI	GYE 1200.1	3,6	1600	1380	1378	1185	1	300	1290	654	602	295	3/8	1/2
	GYE 1500.1	4,8	1885	1625	1655	1423	1	300	1186	654	602	295	3/8	1/2	
	GYE 2000.1	7,2	2500	2150	2181	1876	1	300	1035	654	602	295	3/8	1/2	
6 mm	ÇİFT FANLI	GYE 2300.2	7,2	3131	2695	2721	2340	1	300	2006	904	602	295	3/8	1/2
	GYE 2500.2	8,9	3390	2916	2990	2571	2	300	1818	904	602	295	3/8	1/2	
	GYE 3000.2	10,8	3996	3436	3421	2942	2	300	1660	904	602	295	3/8	1/2	
6 mm	ÜÇ FANLI	GYE 3500.3	10,5	4546	3909	3972	3416	3	300	2968	1314	602	295	3/8	1/2
	GYE 4000.3	13,2	5228	4496	4605	3960	3	300	2675	1314	602	295	3/8	1/2	
	GYE 4500.3	15,9	5912	5085	5116	4400	3	300	2441	1314	602	295	3/8	1/2	